


Features

- High Speed Power Switching, Logic level
- Enhanced Body diode DV/DT capability
- Enhanced Avalanche Ruggedness
- 100% UIS Tested, 100% Rg Tested
- Lead Free, Halogen Free

Application

- DC/DC Converter
- Motor Drivers
- Ideal for high-frequency switching and synchronous rectification




MC1A70AG: Device code
XXXX: Code


Marking and pin assignment

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
100V	7.5m Ω @10V	70A
	10.5m Ω @4.5V	



PDFN5X6-8L view



Schematic diagram



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	100	V
V_{GS}	Gate-Source Voltage	± 20	V
E_{AS}	Single pulse avalanche energy ^{Note1}	105	mJ
T_J, T_{STG}	Storage Temperature Range	-55 to 150	°C
I_S	Diode Continuous Forward Current	$T_C=25^\circ\text{C}$ 70	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^\circ\text{C}$ 250	A
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$ 70	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$ 90	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	30	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MC1A70AG	PDFN5X6-8L	MC1A70AG	5,000	10,000	70,000	13"reel

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} =0V	--	--	1.0	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.7	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =30A	--	7.5	10	mΩ
		V _{GS} =4.5V, I _D =20A	--	10.5	15	mΩ
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =50V, V _{GS} =0V, f=1MHz	--	1480	--	pF
C _{OSS}	Output Capacitance		--	230	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	10	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =50V, I _D =20A, V _{GS} =10V	--	25.2	--	nC
Q _{gs}	Gate Source Charge		--	6	--	nC
Q _{gd}	Gate Drain Charge		--	5	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =50V, I _D =20A, V _{GS} =10V, R _G =4.5Ω	--	14	--	nS
t _r	Turn-on Rise Time		--	21	--	nS
t _{d(off)}	Turn-Off Delay Time		--	40	--	nS
t _f	Turn-Off Fall Time		--	30	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25℃, Is=20A	--	--	1.2	V

Note :

1、EAS Test condition : V_{DD}=20V,V_{GS}=10V,L=0.3mH, R_G=25Ω,Starting T_J=25° C.

Typical Operating Characteristics

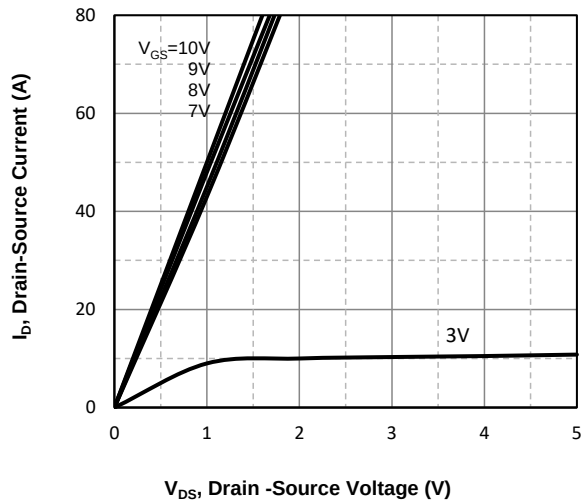


Fig1. Typical Output Characteristics

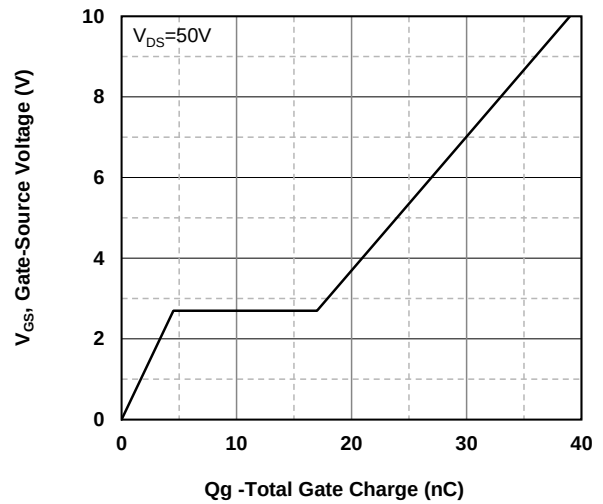


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

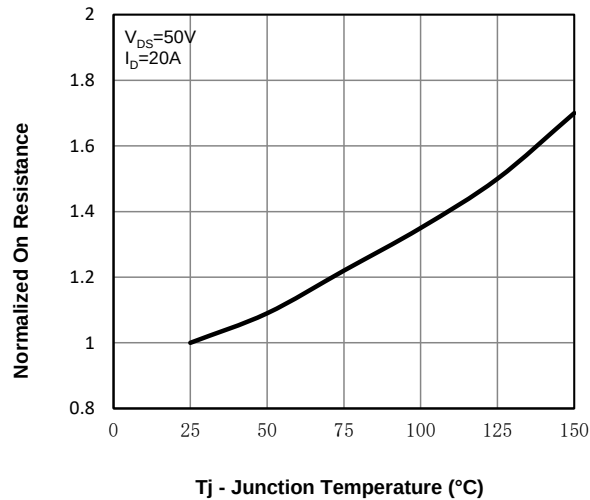


Fig3. Normalized On-Resistance Vs. Temperature

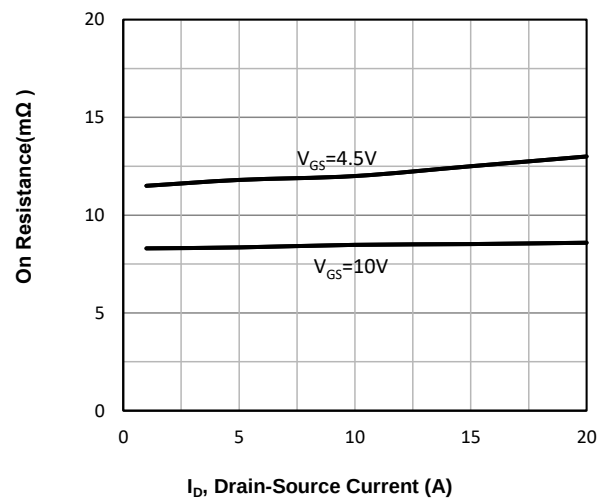


Fig4. On-Resistance Vs. Drain-Source Current

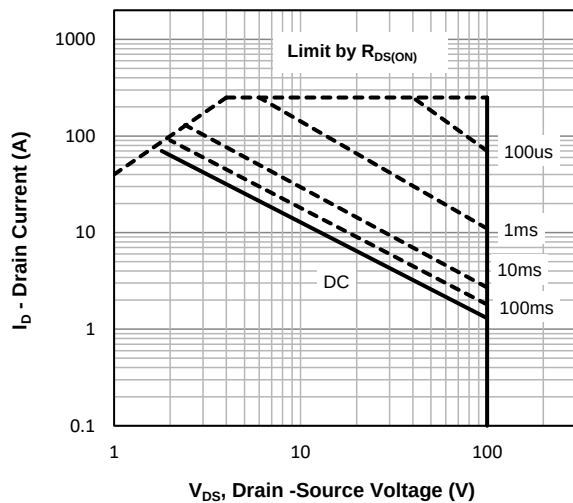


Fig5. Maximum Safe Operating Area


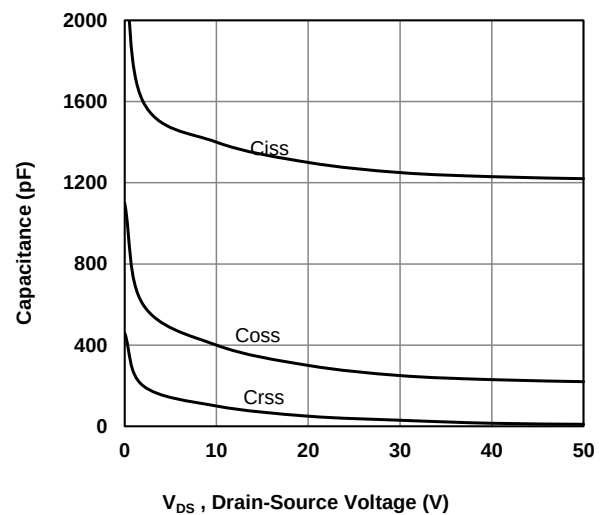


Fig6 Typical Capacitance Vs. Drain-Source Voltage

PDFN5X6-8L Package information

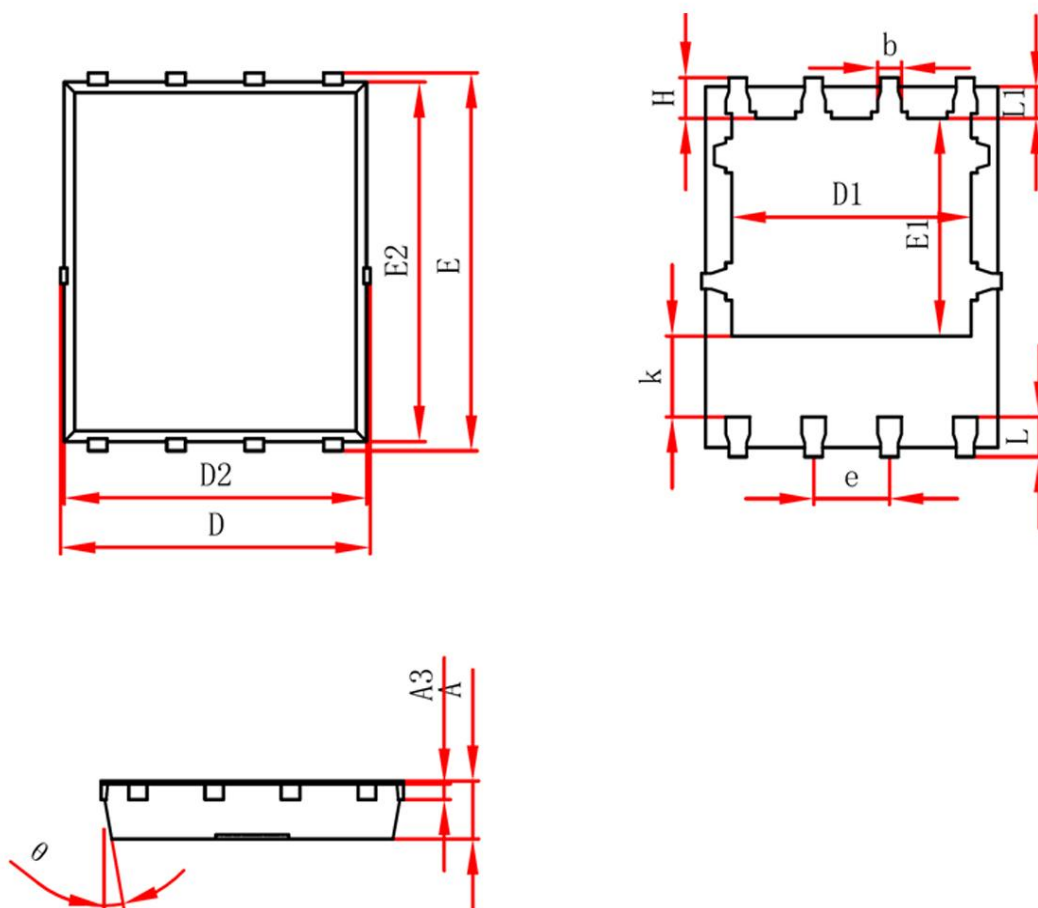

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.950	1.050	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.950	5.050	0.196	0.200
E	5.950	6.050	0.235	0.239
D1	4.026	4.126	0.159	0.163
E1	3.510	3.610	0.139	0.143
D2	4.850	4.950	0.192	0.196
E2	5.700	5.800	0.225	0.229
k	1.190	1.390	0.047	0.055
b	0.300	0.400	0.012	0.016
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
θ	10°	12°	10°	12°