

Features


- High power and current handing capability
- Lead free product is acquired
- Surface mount package

Application


- Battery protection
- Load switch
- Power management

Product Summary


V_{DS}	$R_{DS(ON)}$ TYP	I_D
30V	9.0m Ω @10V	30A
	15m Ω @4.5V	
-30V	20m Ω @-10V	-30A
	27m Ω @-4.5V	



MEPD30A : Device code
XXXX : Code



PDFN3X3-8L view



Schematic diagram



Halogen-Free

Marking and pin assignment

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	N-Channel	P-Channel	Unit
--------	-----------	-----------	-----------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	30	-30	V
V_{GS}	Gate-Source Voltage	± 20	± 20	V
T_J	Maximum Junction Temperature	150	150	$^{\circ}C$
T_{STG}	Storage Temperature Range	-55 to 150	-55 to 150	$^{\circ}C$
I_S	Diode Continuous Forward Current	30	-30	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_c=25^{\circ}C$	120	-120	A
I_D	Continuous Drain Current	$T_c=25^{\circ}C$	30	-30	A
P_D	Maximum Power Dissipation	$T_c=25^{\circ}C$	35	35	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient		105	105	$^{\circ}C/W$

Ordering Information (Example)







Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MEPD30A	PDFN3X3-8L	MEPD30A	5,000	10,000	70,000	13"reel



N-CH Electrical Characteristics (T _J =25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V	--	--	1.0	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.5	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =15A	--	9	15	mΩ
		V _{GS} =4.5V, I _D =8A	--	15	25	mΩ
Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	726	--	pF
C _{OSS}	Output Capacitance		--	74	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	63	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =15V, I _D =10A, V _{GS} =10V	--	13.2	--	nC
Q _{gs}	Gate Source Charge		--	2.4	--	nC
Q _{gd}	Gate Drain Charge		--	2.5	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =15V, R _G =6Ω, V _{GS} =10V, I _D =1A	--	10	--	nS
t _r	Turn-on Rise Time		--	7	--	nS
t _{d(off)}	Turn-Off Delay Time		--	24	--	nS
t _f	Turn-Off Fall Time		--	8	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	T _J =25°C, I _S =10A	--	--	1.2	V

P-CH Electrical Characteristics (T _J =25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T _J = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V	--	--	-1.0	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0	-1.5	-2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-15A	--	20	27	mΩ
		V _{GS} =-4.5V, I _D =-8A	--	27	45	mΩ
Dynamic Electrical Characteristics @ T _J = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1MHz	--	670	--	pF
C _{OSS}	Output Capacitance		--	115	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	95	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =-15V, I _D =-8A, V _{GS} =-10V	--	51	--	nC
Q _{gs}	Gate Source Charge		--	9.8	--	nC
Q _{gd}	Gate Drain Charge		--	8.2	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =-15V, I _D =-1A, V _{GS} =-10V, R _G =6Ω	--	13	--	nS
t _r	Turn-on Rise Time		--	15	--	nS
t _{d(off)}	Turn-Off Delay Time		--	199	--	nS
t _f	Turn-Off Fall Time		--	98	--	nS
Source-Drain Diode Characteristics						
V _{SD}	Forward on voltage	T _J =25°C, I _S =-10A	--	--	-1.2	V

N-Channel Typical Operating Characteristics

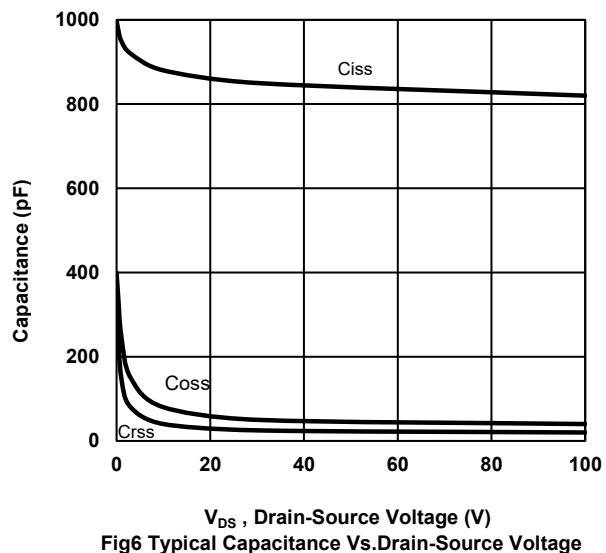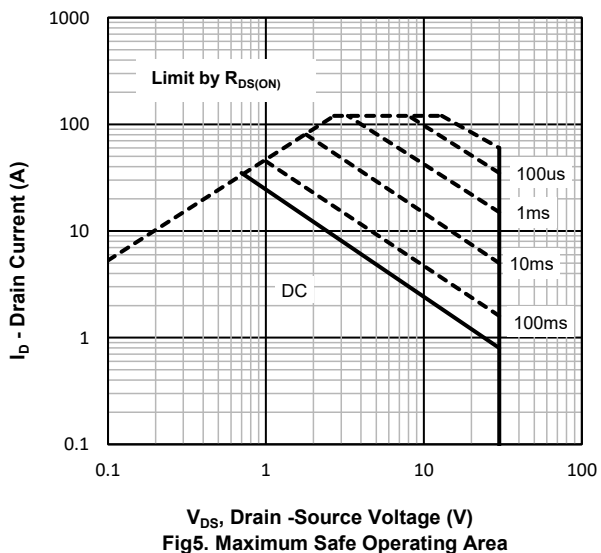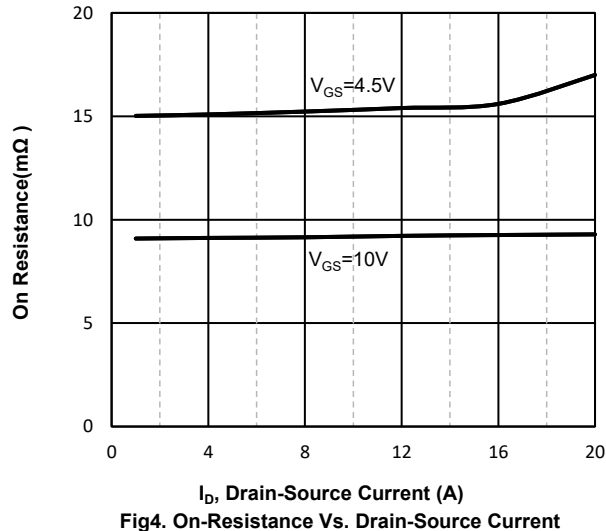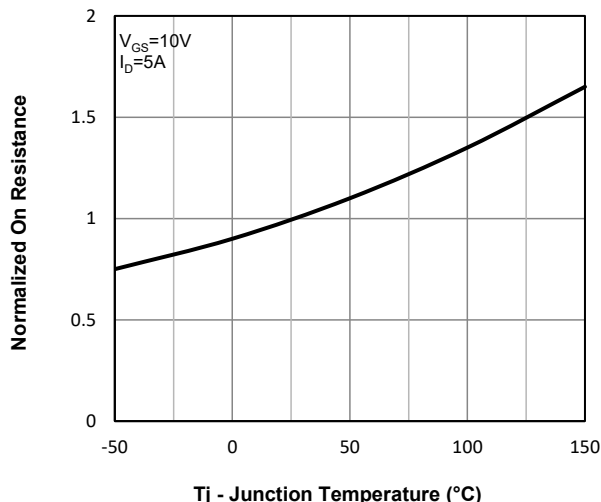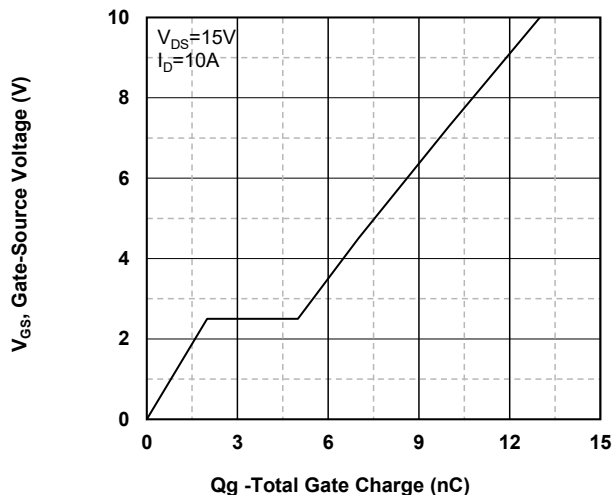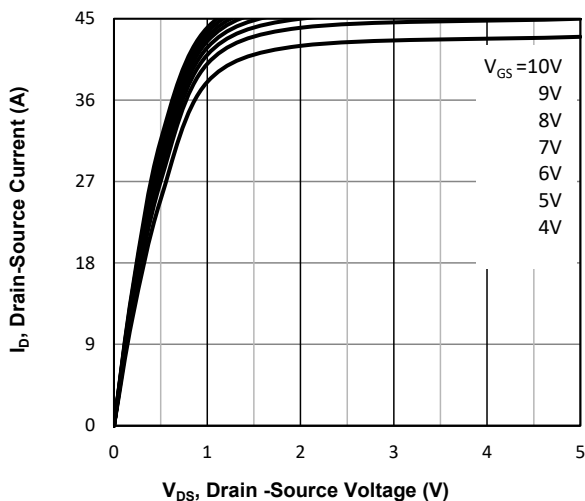

P-Channel Typical Operating Characteristics

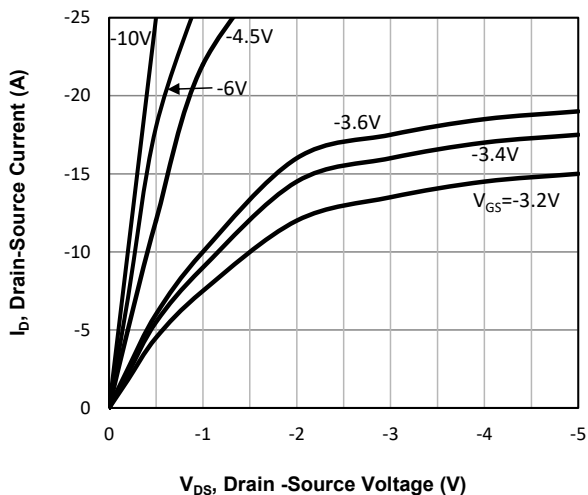


Fig7. Typical Output Characteristics

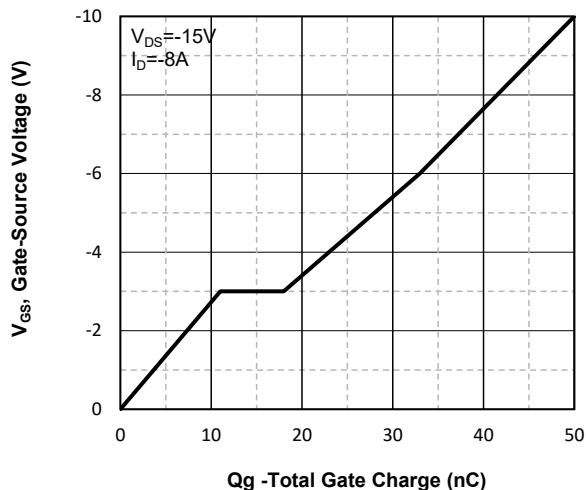


Fig8. Typical Gate Charge Vs. Gate-Source Voltage

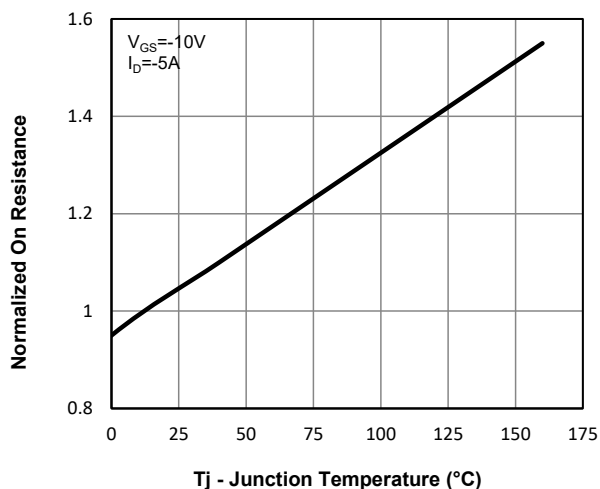


Fig9. Normalized On-Resistance Vs. Temperature

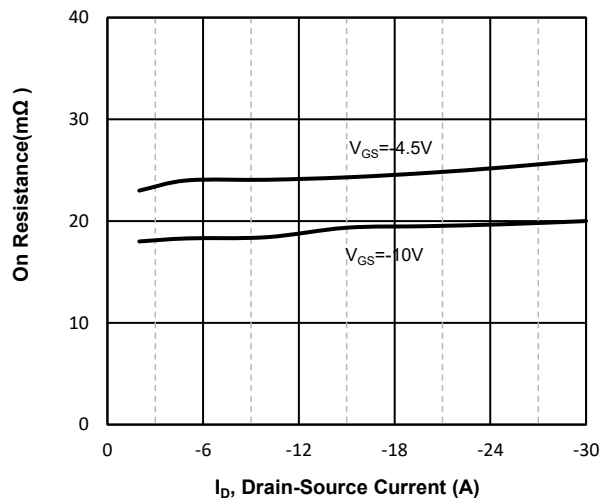


Fig10. On-Resistance Vs. Drain-Source Current

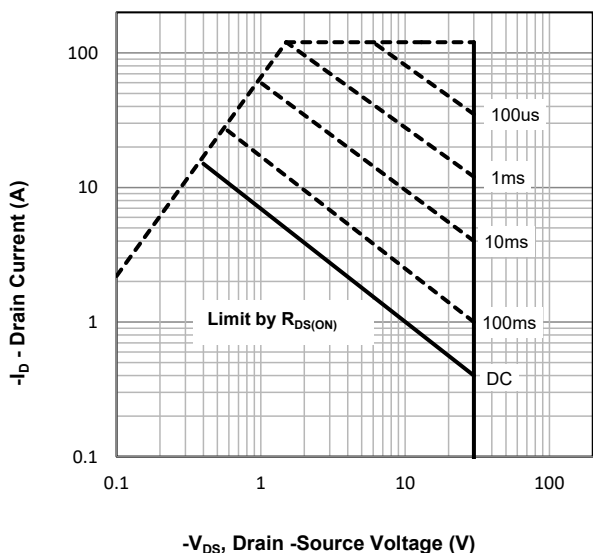


Fig11. Maximum Safe Operating Area

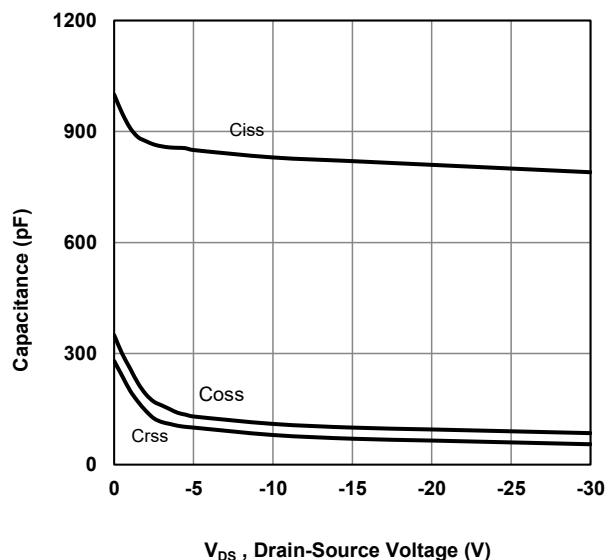
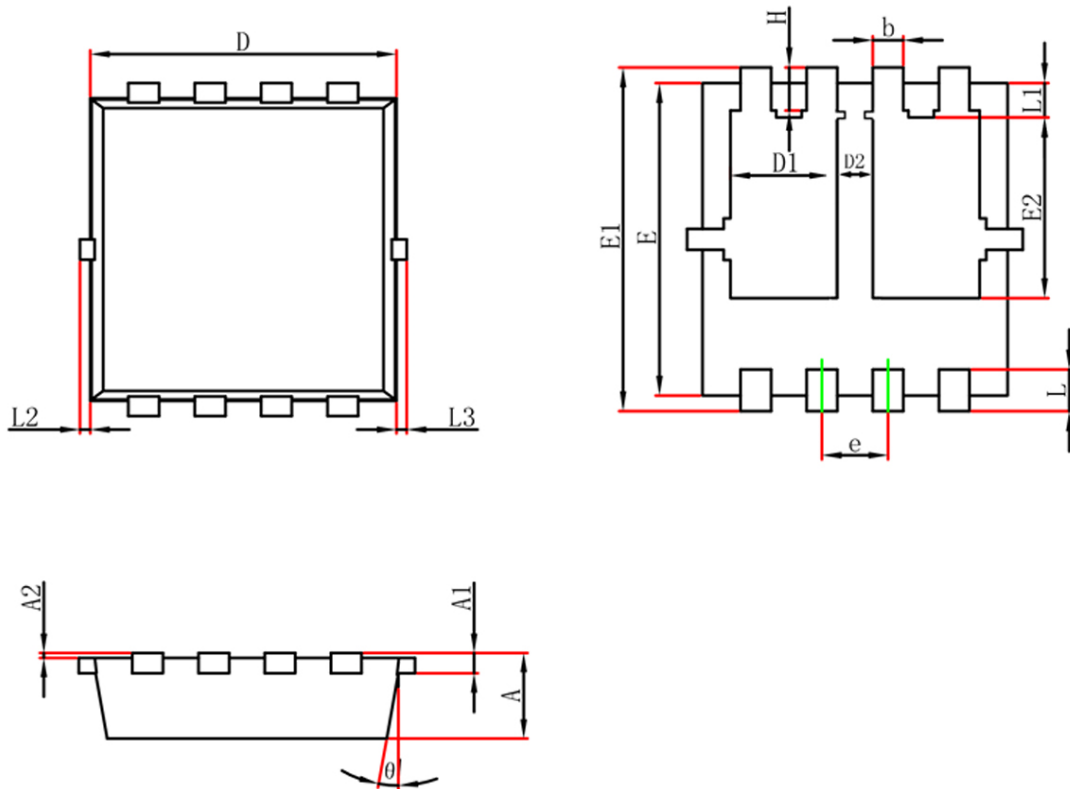


Fig12. Typical Capacitance Vs. Drain-Source Voltage

PDFN3X3-8L Package information


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.750	0.850	0.030	0.034
A1	0.152 REF.		0.006 REF.	
A2	0~0.05		0~0.002	
D	3.050	3.150	0.121	0.125
D1	0.985	1.085	0.039	0.043
D2	0.330	0.430	0.013	0.017
E	2.950	3.050	0.117	0.121
E1	3.250	3.350	0.129	0.132
E2	1.685	1.785	0.067	0.071
b	0.250	0.350	0.010	0.014
e	0.600	0.700	0.024	0.028
L	0.350	0.450	0.014	0.018
L1	0.280	0.380	0.011	0.015
L2	0~0.100		0~0.004	
L3	0~0.100		0~0.004	
H	0.350	0.450	0.014	0.018
θ	9°	13°	10°	12°