

Features


- High-Side Switching
- Low Threshold
- Fast Switching Speed

Application

- Load/ Power Switching
- Interfacing Switching
- Battery Management for Ultra Small Portable Electronics

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
50V	0.85Ω@10V	0.34A
	1.0Ω@4.5V	
-50V	3.6Ω@-10V	-0.18A
	4.0Ω@-4.5V	




Marking and pin assignment

75S: Device code



SOT-563 top view



Schematic diagram



Pb-Free



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	N-Channel	P-Channel	Unit
--------	-----------	-----------	-----------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	50	-50	V
V_{GS}	Gate-Source Voltage	±20	±20	V
T_J	Maximum Junction Temperature	150	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	-55 to 150	°C
I_S	Diode Continuous Forward Current	$T_C=25^{\circ}C$ 0.34	-0.18	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}C$ 1	-0.52	A
I_D	Continuous Drain Current	$T_C=25^{\circ}C$ 0.34	-0.18	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}C$ 1.5	1.5	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	380	380	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSX7252	SOT-563	75S	3,000	45,000	180,000	7"reel

N-Ch Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	50	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =50V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	0.5	0.8	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =0.3A	--	0.85	3.0	Ω
		V _{GS} =5V, I _D =0.2A	--	1.0	3.5	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	42	--	pF
C _{OSS}	Output Capacitance		--	15	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	3	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =25V, I _D =0.34A, V _{GS} =4.5V	--	7	--	nC
Q _{gs}	Gate Source Charge		--	1.8	--	nC
Q _{gd}	Gate Drain Charge		--	0.6	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =25V, I _D =0.34A, V _{GS} =4.5V, R _G =10Ω	--	4.6	--	nS
t _r	Turn-on Rise Time		--	6.8	--	nS
t _{d(off)}	Turn-Off Delay Time		--	19	--	nS
t _f	Turn-Off Fall Time		--	11.5	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=0.34A	--	--	1.2	V

P-Ch Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-50	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-50V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0	-1.3	-2.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-0.13A	--	3.6	5.0	Ω
		V _{GS} =-5V, I _D =-0.10A	--	4.0	10	Ω

Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

C _{ISS}	Input Capacitance	V _{DS} =-25V, V _{GS} =0V, f=1MHz	--	35	--	pF
C _{OSS}	Output Capacitance		--	5	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	2.5	--	pF







Switching Characteristics

Q _g	Total Gate Charge	V _{DD} =-25V, I _D =-0.18A, V _{GS} =-4.5V	--	1.77	--	nC
Q _{gs}	Gate Source Charge		--	0.57	--	nC
Q _{gd}	Gate Drain Charge		--	0.18	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =-25V, I _D =-0.18A, V _{GS} =-4.5V, R _G =2.5Ω	--	2.5	--	nS
t _r	Turn-on Rise Time		--	1	--	nS
t _{d(off)}	Turn-Off Delay Time		--	16	--	nS
t _f	Turn-Off Fall Time		--	8	--	nS







Source- Drain Diode Characteristics

V _{SD}	Forward on voltage	T _J =25°C, I _S =-0.18A	--	--	-1.2	V
-----------------	--------------------	--	----	----	------	---


N-Ch Typical Operating Characteristics

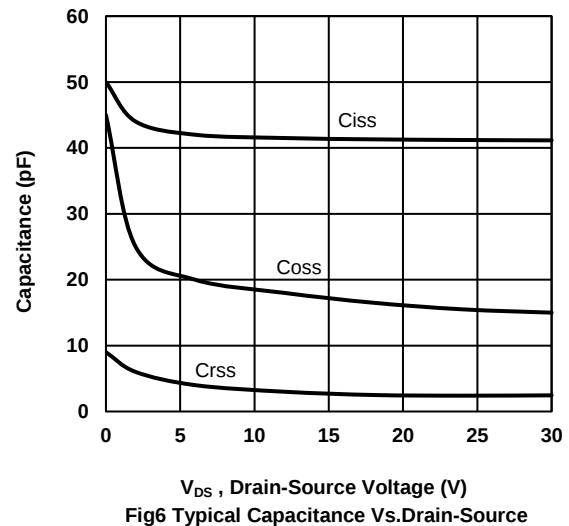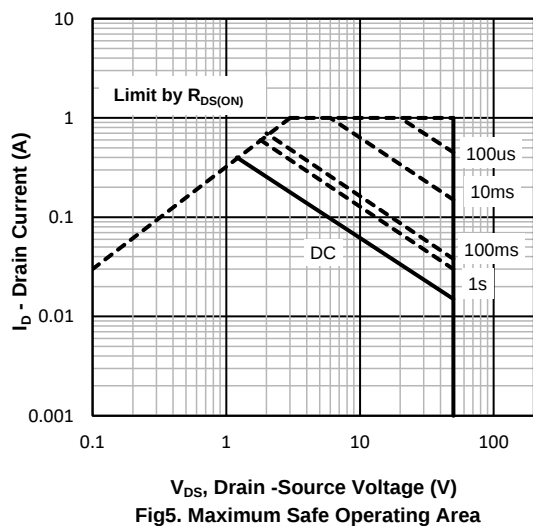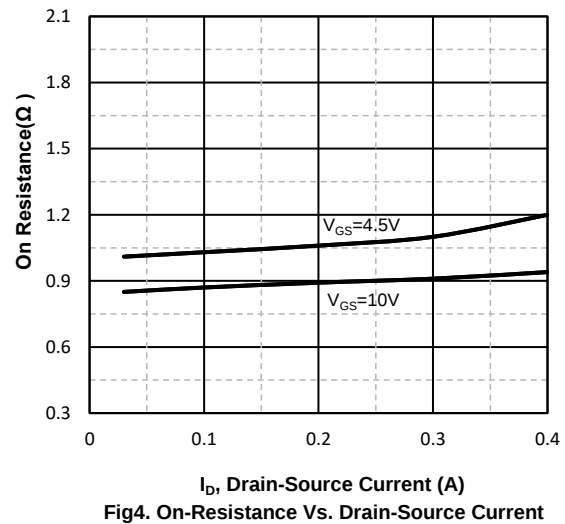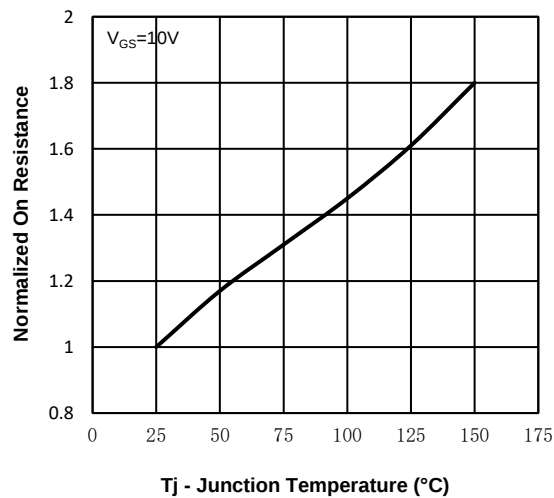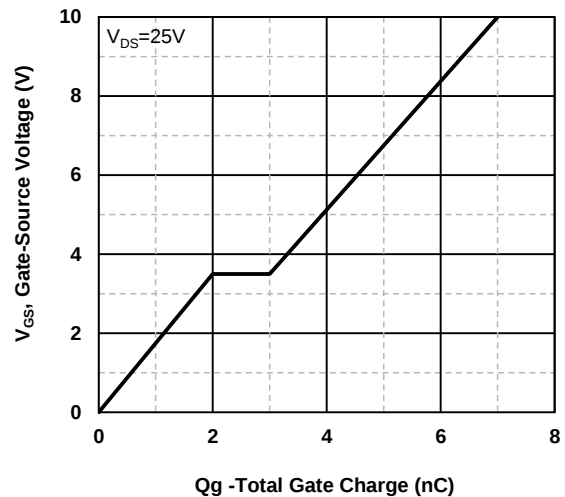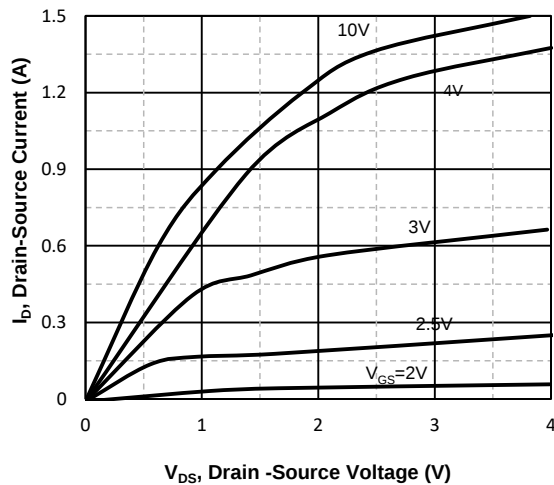

P-Ch Typical Operating Characteristics

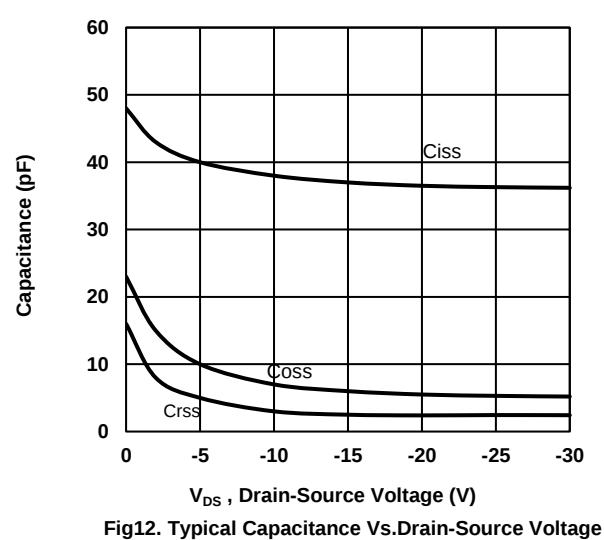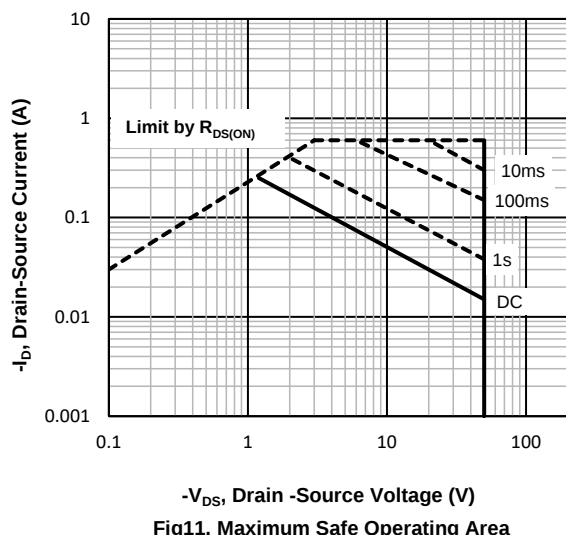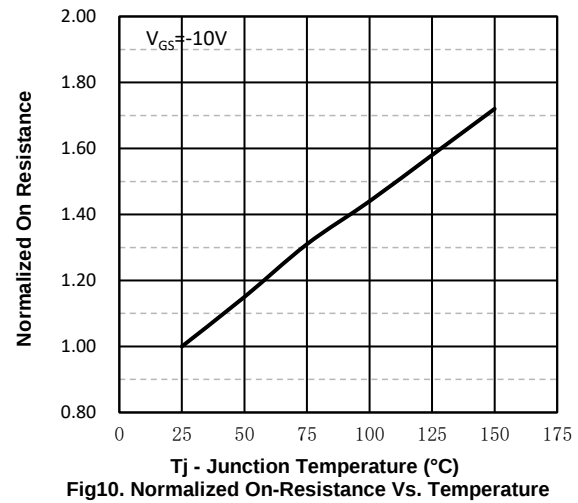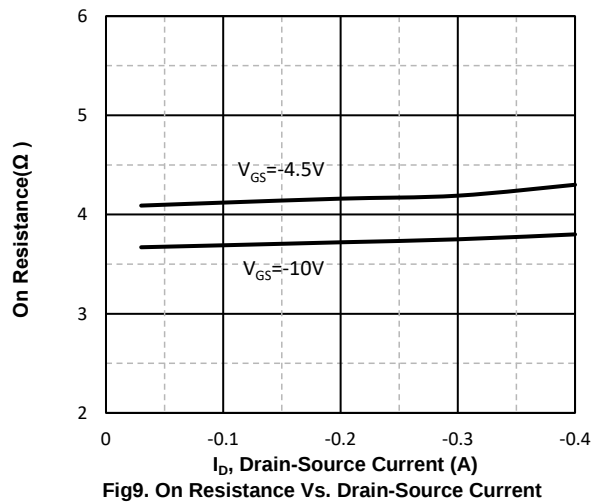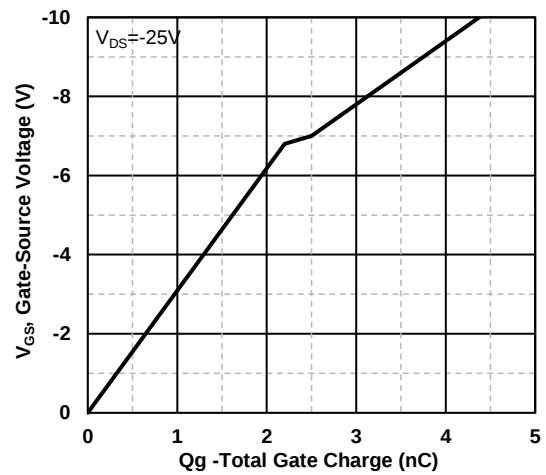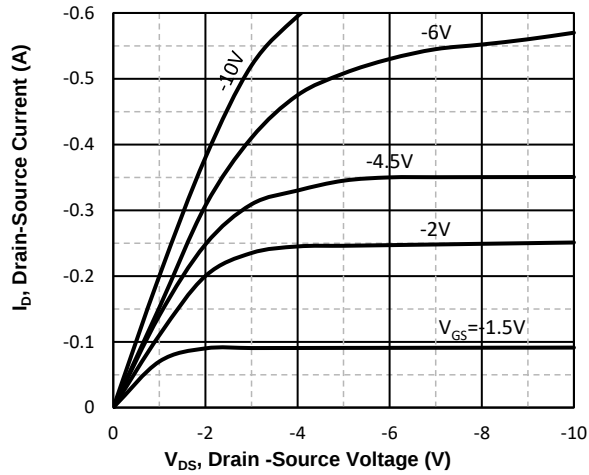

SOT-563 Package information

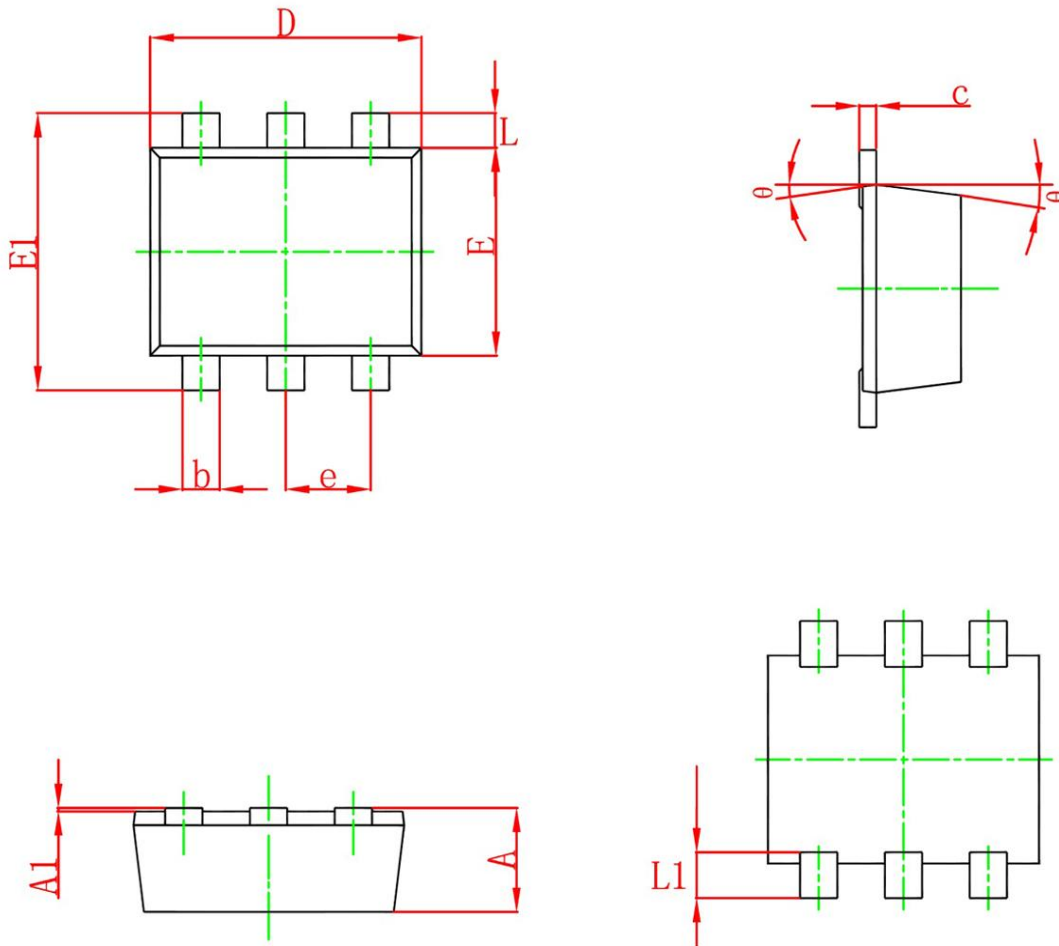

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.500	0.600	0.020	0.024
A1	0.000	0.050	0.000	0.002
e	0.450	0.550	0.018	0.022
c	0.090	0.180	0.004	0.007
D	1.500	1.700	0.059	0.067
b	0.170	0.270	0.007	0.011
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
L	0.100	0.300	0.004	0.012
L1	0.200	0.400	0.008	0.016
θ	10° REF.		10° REF.	