

Features

- Integrate fast recovery diode
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability

Application

- Switch Mode Power Supply (SMPS)
- Motor Controls
- Power Factor Correction (PFC)



Halogen-Free

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
650V	1.15Ω@10V	7A




TO-220F



TO-220



TO-252



Absolute Maximum Ratings (TA=25°C unless otherwise note)

Symbol	Parameter		Value			Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			TO-220F	TO-220	TO-252	
V _{DS}	Drain-Source Breakdown Voltage		650			V
V _{GS}	Gate-Source Voltage		±30			V
T _J	Maximum Junction Temperature		150			°C
T _{STG}	Storage Temperature Range		-50 to 155			°C
I _S	Diode Continuous Forward Current	Tc=25°C	7			A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}C$	28	A
I_D	Continuous Drain Current	$T_C=25^{\circ}C$	7	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}C$	108	W
$R_{th(ch-c)}$	Thermal resistance, Channel to Case		3.45	°C/W
E_{AS}	Single pulse avalanche energy ^(Notes1)		350	mJ

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSYF7N65	TO-220F	MLSYF7N65	50	1,000	5,000	Tube
MLSY7N65	TO-220	MLSY7N65	50	1,000	5,000	Tube
MLSU7N65	TO-252	MLSU7N65	2,500	5,000	35,000	13"reel







Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	650	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =650V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±30V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	2	3	4	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =3.5A	--	1.15	1.4	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	1300	--	pF
C _{OSS}	Output Capacitance		--	95	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	8.9	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =520V, I _D =7A, V _{GS} =10V	--	25	--	nC
Q _{gs}	Gate Source Charge		--	5	--	nC
Q _{gd}	Gate Drain Charge		--	10	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =325V, I _D =7A, R _G =10Ω	--	18	--	nS
t _r	Turn-on Rise Time		--	15	--	nS
t _{d(off)}	Turn-Off Delay Time		--	35	--	nS
t _f	Turn-Off Fall Time		--	15	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	T _J =25°C, I _S =7A,	--	--	1.4	V


Note:

1、L=10mH, V_{DD}=50V, R_G=25Ω, Starting T_J=25°C

Typical Operating Characteristics

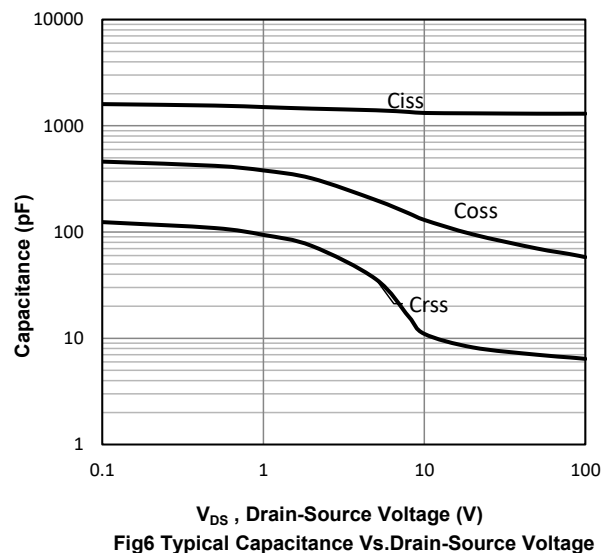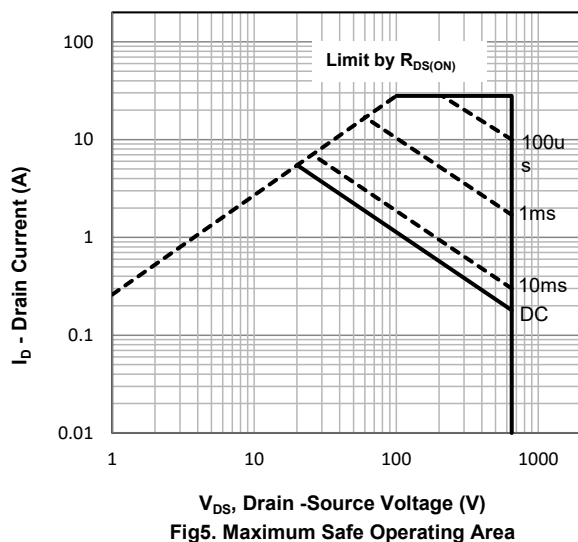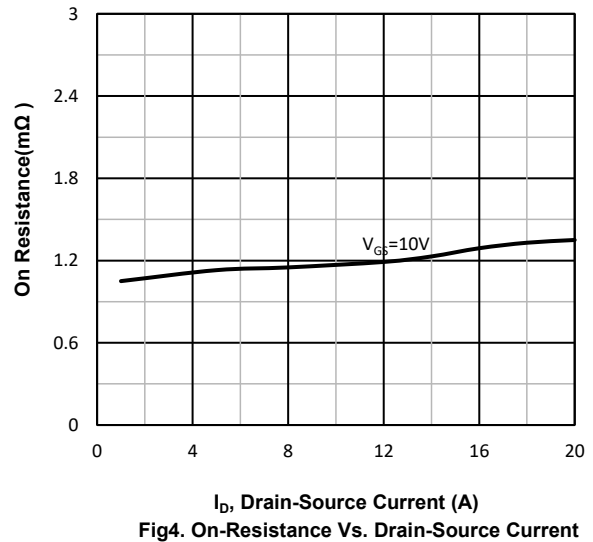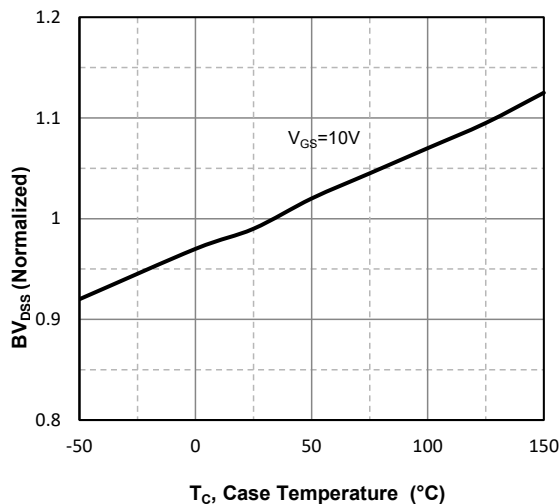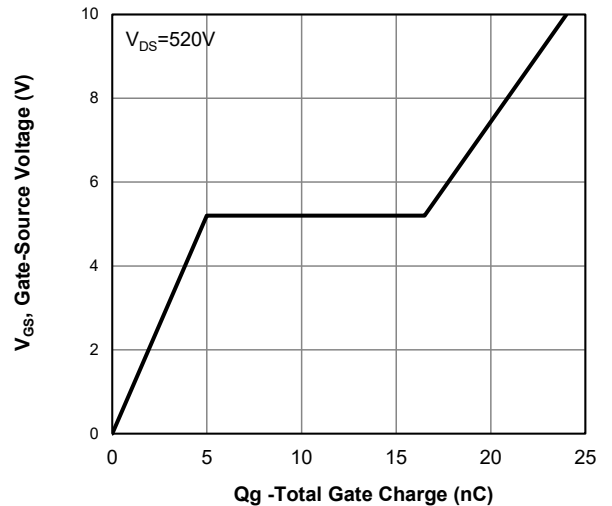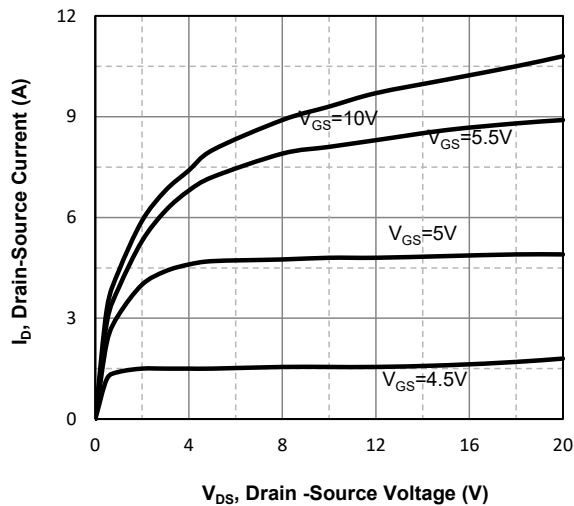


TO-220F Package information

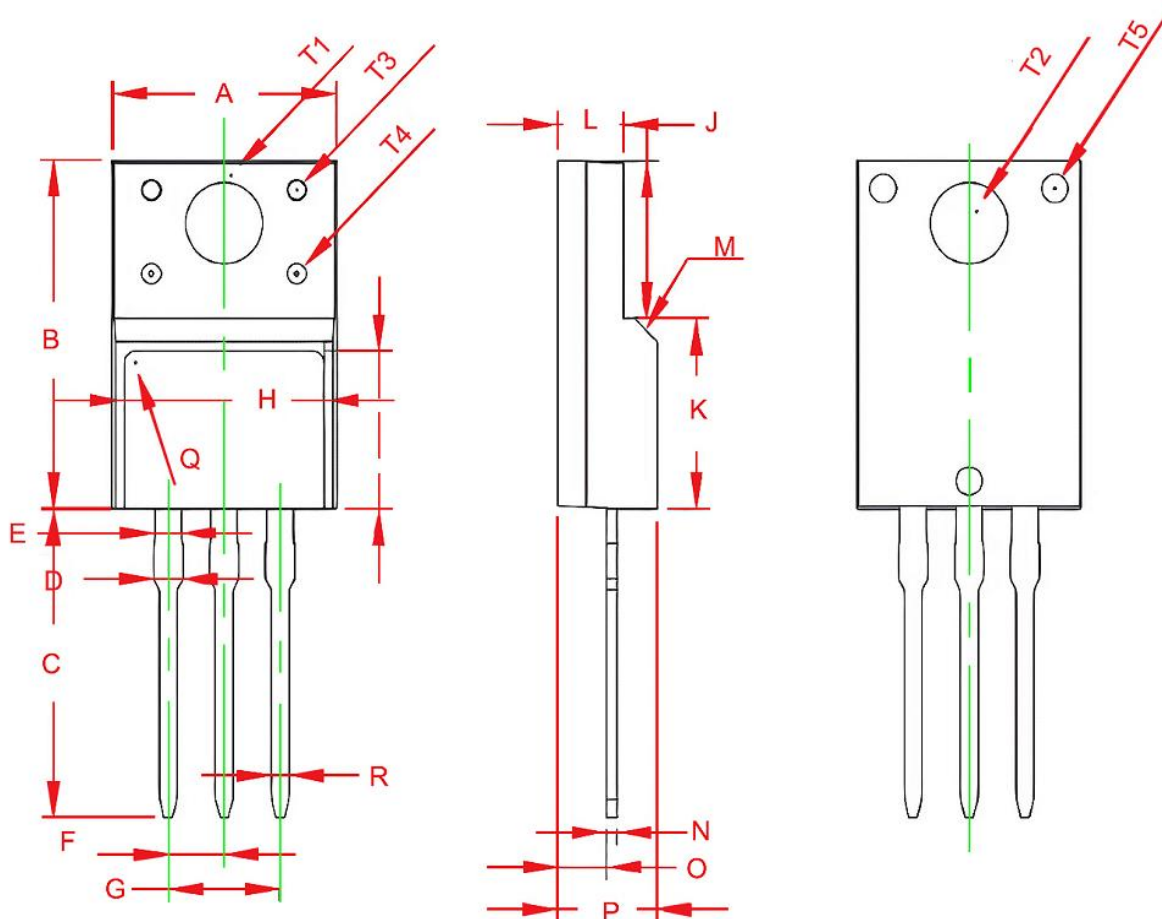


Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	9.960	10.360	0.392	0.407
B	15.670	16.070	0.616	0.632
C	13.140	13.540	0.517	0.533
D	1.200	1.400	0.047	0.055
E	1.200TYP		0.047TYP	
F	2.540TYP		0.100TYP	
G	5.080TYP		0.200TYP	
H	7.600	8.000	0.299	0.314
I	7.100	7.500	0.279	0.295
J	6.480	6.880	0.255	0.270
K	8.990	9.390	0.353	0.369
L	2.340	2.740	0.092	0.107
M	45°TYP		45°TYP	
N	0.490	0.520	0.019	0.020
O	2.150	2.550	0.084	0.100
P	4.500	4.900	0.177	0.192
Q	0.500TYP		0.019TYP	
S	4.5°TYP		4.5°TYP	
T1	3.450TYP		0.135TYP	
T2	3.180TYP		0.125TYP	
T3	1.500TYP		0.059TYP	
T4	1.200TYP		0.047TYP	
T5	1.500TYP		0.059TYP	
R	0.770	0.830	0.030	0.032

TO-252 Package information

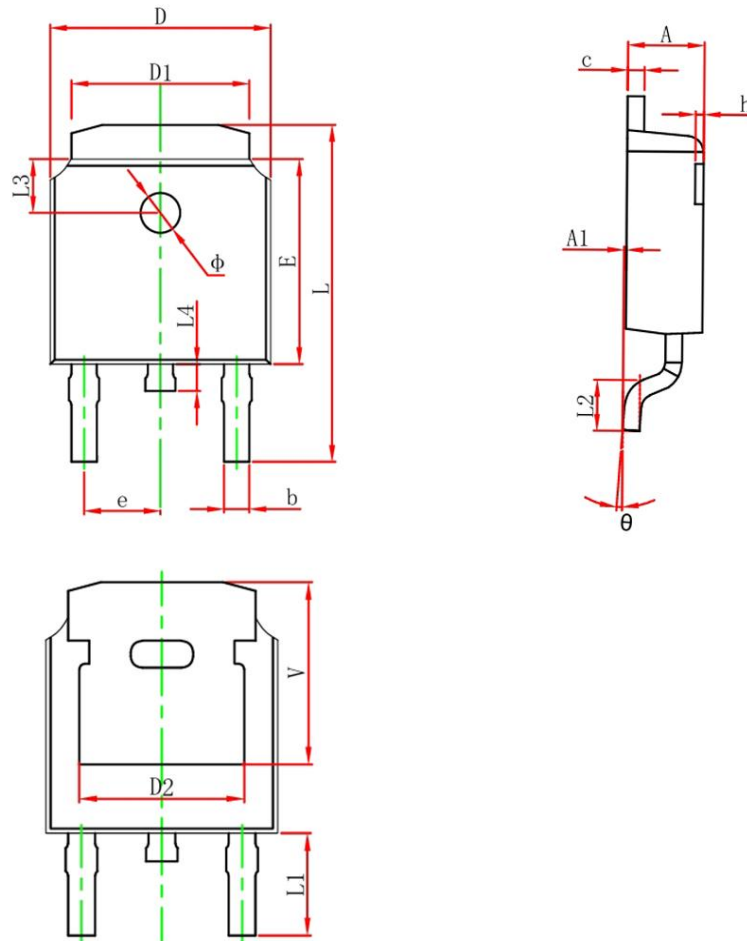

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.450	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.386	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
ϕ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	

TO-220 Package information

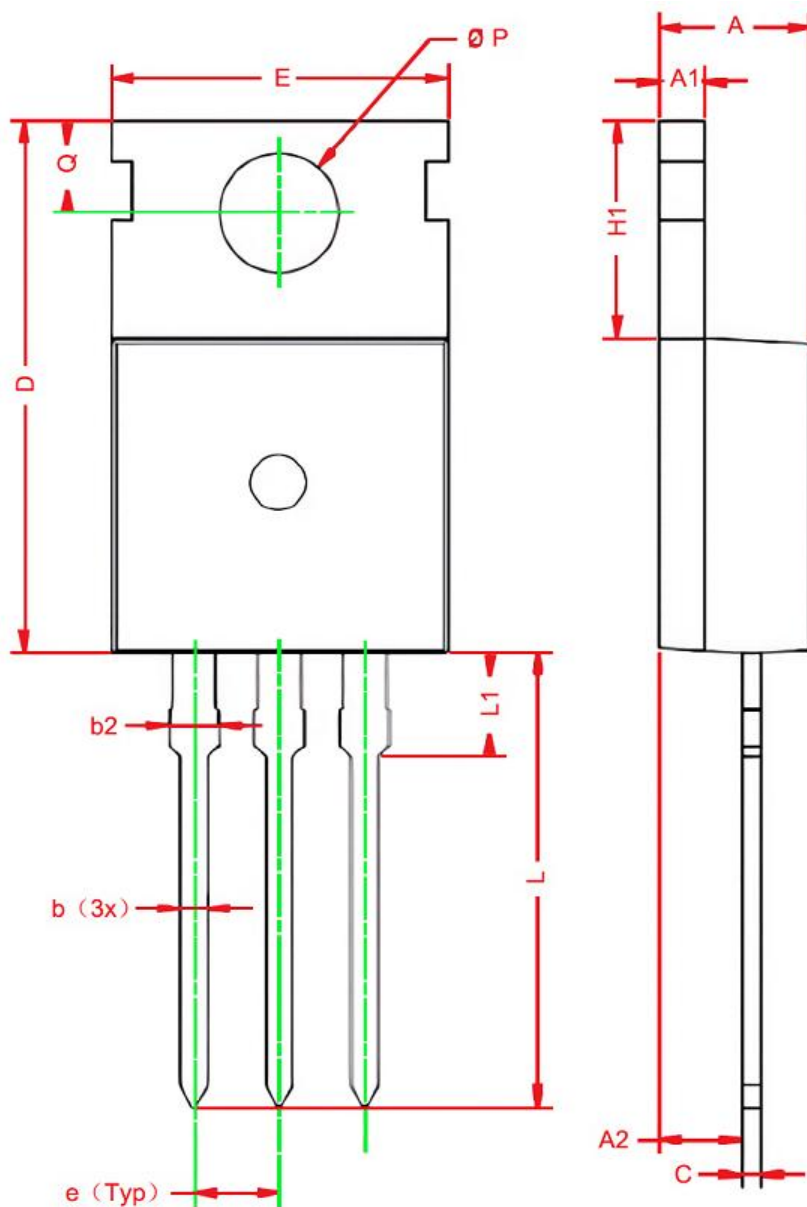

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	3.600	4.800	0.142	0.189
A1	1.200	1.400	0.047	0.055
A2	2.030	2.900	0.080	0.114
b	0.400	1.000	0.016	0.039
b2	1.200	1.780	0.047	0.070
c	0.360	0.600	0.014	0.024
D	14.220	16.500	0.561	0.651
e	2.340	2.740	0.092	0.108
E	9.700	10.600	0.383	0.418
H1	5.840	6.850	0.230	0.270
L	12.700	14.700	0.501	0.580
L1	2.700	3.300	0.106	0.130
$\varnothing P$	3.500	4.000	0.138	0.158
Q	2.540	3.400	0.100	0.134